

JR206-FK

Vandal-proof Custom SIP Telephone



The JR200 series telephones are designed to meet the needs of clients who experience loss through vandalism. Ideal for parking lots, prisons, airports, railways, metro, ATMs, platforms, hospitals, police stations, shopping malls, stadiums, etc.

Housed in a steel box and manufactured to a high standard, the phone offers increased resistance to vandalism and ensures that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent artificial damage, while the keypad is weather and vandal-resistant.



TDM Middle East LLC
ADAFZ, Abu Dhabi, UAE

www.tdm-middle-east.com

info@tdm-middle-east.com

FEATURES

- Standard **SIP** phone
- Robust housing, constructed of **stainless steel** with powder coated
- Vandal resistant 83CM armoured cord handset
- **One button**
- Two LED indicate lights:
 - **One LED light, always on during calls**, silk screen printing "ON"
 - **Another LED light controlled by the Control-room telephone**, silk screen printing "HELP ON THE WAY"
 - When the corresponding button on the security room is pressed, it will light up for ten minutes. If it is not pressed, it will not light up.
- Programmable for auto-dial
- Weather proof protection: IP55
- **POE or DC12V powered (SIP)**
- RJ45 port for SIP connection
- **Wall mounting**, Simple installation
- CE, FCC, IK10, RoHS, ISO9001 compliant

SIP-VoIP TECHNICAL SPECIFICATIONS

Power:

12V DC or PoE: IEEE802.3af/at

Port:

WAN: 10/100Base-T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base-T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle:1.5W/ Active:1.8W

VOICE FEATURES

- Support SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex
- SIP support SIP domain, SIP authentication (none, basic, MD5), DNS name of server
- DTMF: SIP info, DTMF Relay, RFC2833
- Call control feature: Flexible dial map, support hot-line



TDM Middle East LLC
ADAFZ, Abu Dhabi, UAE

www.tdm-middle-east.com

info@tdm-middle-east.com

NETWORK FEATURES

- WAN/LAN: support Bridge mode
- Support static IP address
- Support DHCP get IP on WAN port
- Support VLAN
- Support web config
- Data Protocols: IPv4, TCP, UDP, ICMP, ARP, DNS and DNS SRV for SIP Signaling

TECHNICAL SPECIFICATIONS

Casing Material

Stainless steel

Colours

Red, other colours to special order

Handset Material

ABS material handset with stainless steel spiral cord.

Keypad

Weather-sealed tactile digital keypad. **Chroma key and frame are made of zinc alloy.** Vandal resistance.

Hook switch

Magnetic Reed Hook switch

Temperature

Operating: -30°C to +65°C

Storing: -40°C to +75°C


Ringling Tone

Shrill warble tone 90 dBA @ 1 metre typical (SIP)

M.T.B.F.

Calculated to have an M.T.B.F. in excess of 50,000 hours using

DIMENSIOIS (MM):

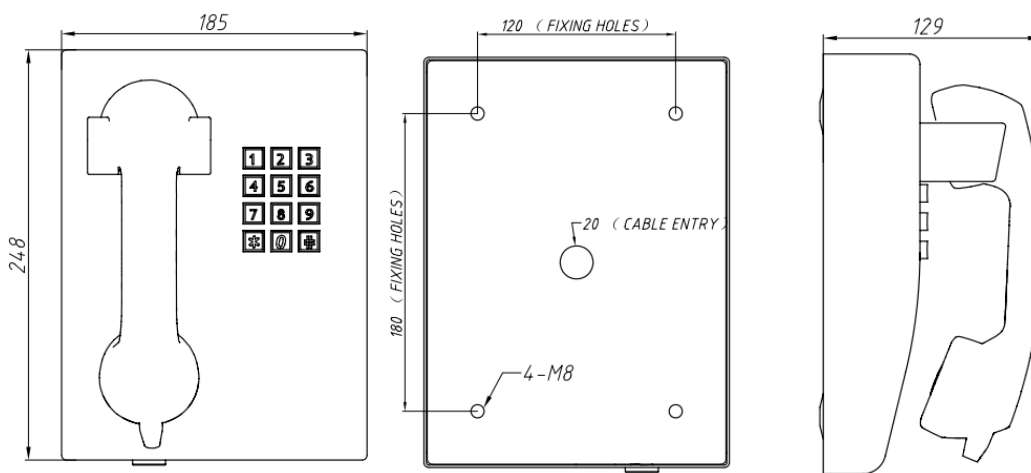

FC

CE

PACKAGE

Unit size: 248 *185 *129(mm)

Carton size:340 *220 *165(mm)

Packaging materials: pearl cotton, carton

Net weight: 3KG Gross weight: 4KG



TDM Middle East LLC
ADAFZ, Abu Dhabi, UAE

www.tdm-middle-east.com

info@tdm-middle-east.com