



JR213-V-2B
Help Point Data sheet

www.tdm-middle-east.com | info@tdm-middle-east.com

Foreword

The JR213-V-2B with 7" screen and built-in camera that designed to meet the needs of client who experience loss through vandalism. Ideal for metro/railway platforms, airport, parking lots, hospitals, police stations, ATM machines, stadiums, outside building or public area etc.

Housed in stainless steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism. The cable entrance is on the back of the phone to prevent from artificial damage, while the LCD screen is tamper resistant. These ensure that the primary function of communications is maintained at all times.

Extremely easy to install, we will also provide the related installation tool and security screws.

General Description

- SIP video help point
- PoE powered or DC 12V powered
- Robust housing, constructed of stainless steel
- Hands-free operation
- Two hands-free speed-dial call buttons
- Built-in induction loop
- On wall mounting type
- The RJ45 cable & power line comes in from the back
- Waterproof rating is IP55-IP65
- 4 X Tamper proof screws for mounting

SIP Protocol:

GSM/PCMU/PCMA/OPUS

G.7211-16000/G.7211-32000

G.729/G.723

Speex-16000/8000/32000

ISAC-16000/32000

AMR/ILBC

SILK-8000/12000/16000/24000

CODEC2

H.263-1998/VP8/H.264

Specification:

Standard SIP 2.0 (RFC3261) protocol

Power Consumption: 16W

Heat dissipation: 64 BTU/Hr

Adapter Input: DC 12V

WAN Port: 10/100Base-T RJ-45 for LAN, Auto MDIX

TDM Middle East LLC
ADAFZ, Abu Dhabi, UAE

www.tdm-middle-east.com

info@tdm-middle-east.com

LAN Port: 10/100Base- T RJ-45 for PC, Auto MDIX
 Support DHCP get IP on WAN port
 connectors, Cat5e or better
 Support configuration by web interface
 The video support H.264, H.263 encoding
 Support Echo cancellation
 Flexible hardware design, rich peripheral interface
 Operating system: Android 5.1
 CPU: Quad-Core ARM Cortex A17 CPU@1.8GHz
 USB interface: Micro usb OTG2.0
 HDMI: V2.0 and support 4K HD output
 RJ45 interface: IEEE802.3af
 Speaker: 8 Ω 10W
 Operating: -30° C to +65° C
 Storing: -40° C to +75° C

Induction Loop:

Effective distance: 60~120 CM
 Power: 8W

Display Specifications:

Item	Specification	Unit
Outline Dimension	164.00*97.0*2.60(Typ.)	mm
Display area	154.2144(H)*85.920(V)	mm
Number of Pixel	1024RGB(H)*600(V)	pixels
Pixel pitch	0.1506(H)*0.1432(V)	mm
Pixel arrangement	RGB Vertical stripe	
Display mode	Normally White TN	
Surface treatment	Hard-coating with EWV film	colors
Back-light	White LED	
System interface	MIPI	
NTSC	50(typ)	%
Viewing Direction	6' CLOCK	

TDM Middle East LLC
 ADAFZ, Abu Dhabi, UAE

www.tdm-middle-east.com

info@tdm-middle-east.com

CAMERA Specifications

The most effective pixel: 1280 (H) * 720 (V)


Sensitivity: 600mV/Lux-sec

Pixel Size: 3 μ m x3 μ m

Image area: 3888 μ m x2208 μ m

Interface type: USB2.0 High Speed

DIMENSIONS

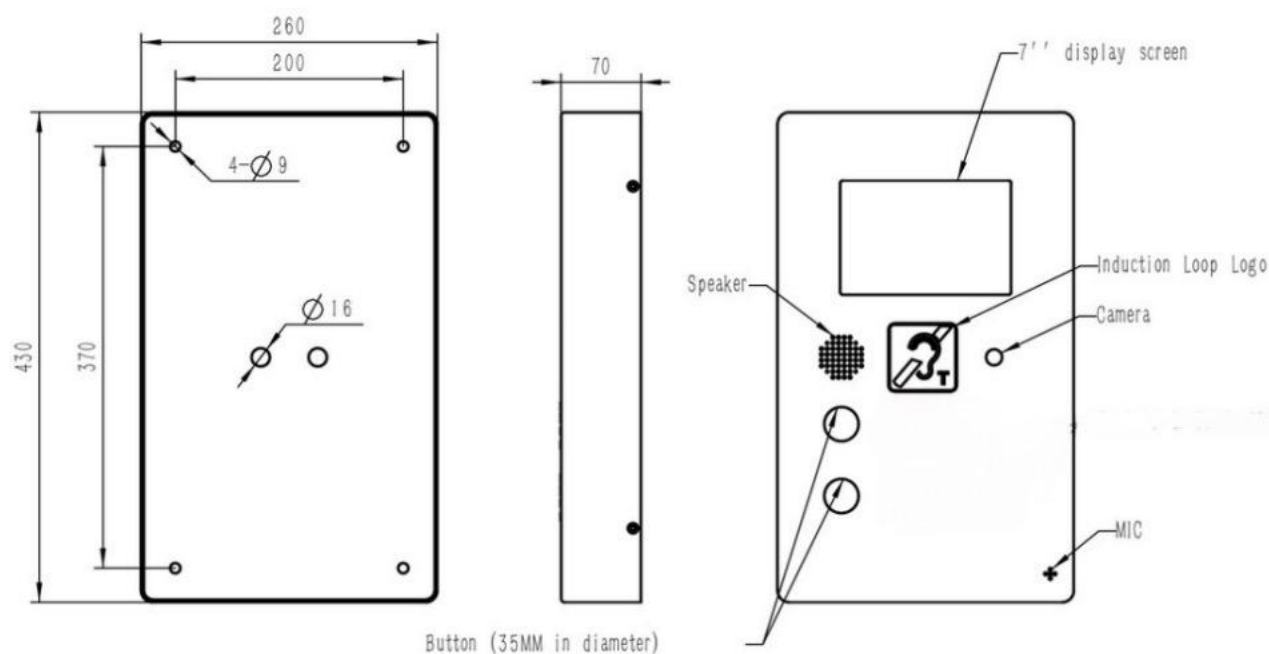

PACKAGE

unit size: 430 *260 *70(mm)

Packaging materials: pearl cotton

Gross weight: 8.0KG

Net weight: 7.5 KG



TDM Middle East LLC
ADAFZ, Abu Dhabi, UAE

www.tdm-middle-east.com

info@tdm-middle-east.com