

JR302-SC-C1

Hands-Free Intercom



The Hands free Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, lifts/elevators, hotels, doorway, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in stainless steel and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the keypad is weather and vandal



TDM Middle East LLC
Regional Office: ADAFZ, Abu Dhabi, UAE
Headquarters: Crawley, UK, RH10 9PD

www.tdm-middle-east.com

info@tdm-middle-east.com

Features:

- Point to Point SIP intercom
- Robust housing, constructed of stainless steel
- 1 Vandal resistant metal buttons
- With camera
- Hands free operation
- Wall mounted, simple installation
- Weather proof protection: IP55-IP65
- POE Power Supply
- RJ45 Port for SIP connection
- 4 X Tamper proof screws for mounting
- CE, FCC, IK10, RoHS, ISO9001 compliant

The point to point communication system can make two way communication without connecting to IP Server

SIP-VoIP TECHNICAL SPECIFICATIONS

- Power:
 - POE
- Power Consumption:
 - Idle: 1.5W/ Active: 1.8W

Camera Features

- The most effective pixel: 1280 (H) *720 (V)
- Sensitivity: 600mV/Lux-sec
- Pixel Size: 3µm x3µm
- Image area: 3888µmx2208µm
- Interface type: USB2.0 High Speed

Voice Features

- Support SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex.
- SIP support SIP domain, SIP authentication (none, basic, MD5), DNS name of server, peer to peer
- DTMF: SIP info, DTMF Relay, RFC2833
- Call control feature: Flexible dial map, support hot-line




TDM Middle East LLC
Regional Office: ADAFZ, Abu Dhabi, UAE
Headquarters: Crawley, UK, RH10 9PD

Specification

- Casing Material
 - Stainless steel
- Button Material
 - Stainless steel button
- Microphone
 - Electret microphone
- Keypad
 - Internal keypad for programming
- Temperature
 - Operating: -30°C to +65°C
 - Storing: -40°C to +75°C
- Weather Resistance
 - IP55-IP65
- Ringing Tone
 - SIP: Shrill warble tone 90 dBA @ 1 metre typical
- M.T.B.F.
 - Calculated to have an M.T.B.F. in excess of 50,000 hours using

Dimensions

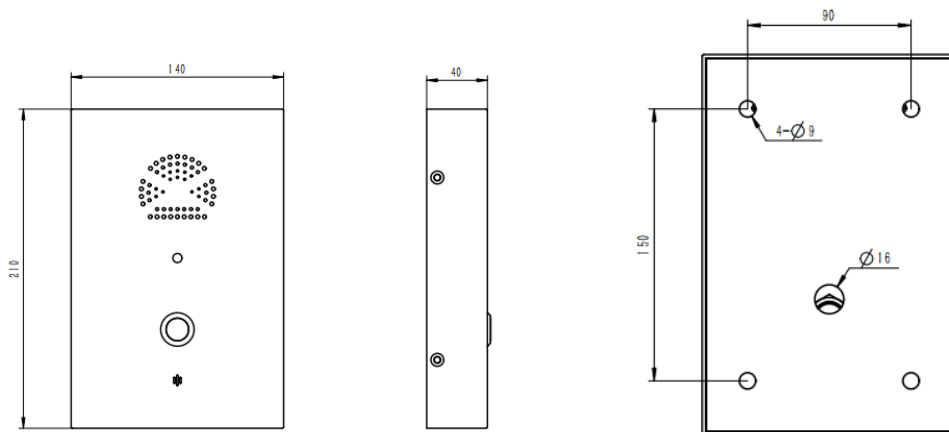

Package

- Unit size: 210 *140 *40 (mm)
- Carton size: 340 *235 *165 (mm)
- Packaging materials: pearl cotton, carton
- Gross weight: 3 KG
- Net weight: 2 KG



TDM Middle East LLC
Regional Office: ADAFZ, Abu Dhabi, UAE
Headquarters: Crawley, UK, RH10 9PD

www.tdm-middle-east.com

info@tdm-middle-east.com