

JREX106 - AL



Explosion-proof Telephone



The explosion proof telephone are designed to provide safe, reliable communication in hazardous areas. The telephones sets were developed for operation in the petrochemical industrial, usually used in production, transportation and refining of oil, natural gas, mining and etc. The housing is made of impact and shock-resistant GRP and even resistant to acids, alkali and lubricants. Its robust design represents a perfect “packaging” for the latest requirements for VoIP telephones combined with proven reliability for critical mission communications and high safety applications.

It is designed to provide ultimate user comfort on the basis of industrial standards and decades of market leading expertise and know-how. The telephone device features a display with integrated heating for ultra-low temperature environments.

Ex eb ib [ib Gb] mb IIC T6/T5 Gb
Ex ib [ib Db] tb IIIC T80°C/T95°C Db
T6/T80°C: -40°C to +40°C
T5/T95°C: -40°C to +55°C
Zone 1,2, 22

- Handset and hands-free speaker phone
- Autodial, memory, mute and menu configuration keys
- Programmable with alphanumeric display and a 20-piece stainless steel keypad
- Stainless steel panel, Back-lit LCD display 128 x 64 pixels—4 line x15 character
- Handset with noise-cancelling microphone and 80 cm armored cord
- The handset supports hearing aid compatibility (HAC)
- Removable handset retainer latches on cradle
- Cradle Switch Life, >1 000 000 times
- Colour optional black, orange, yellow
- Supports wall mounting with mounting bar



TDM Middle East LLC
ADAFZ, Abu Dhabi, UAE

www.tdm-middle-east.com

info@tdm-middle-east.com


Analog Specification	
Power supply	Drawn from telephone line
Operating voltage	24 VDC to 65 VDC
Operating current	20 mA DC to 100 mA DC
Ringer operating voltage	48 VAC to 90 VAC (calling frequency 21 to 54 Hz)
Ringing volume	80 dB (A) @ 1 meter
Dialing method	PD or DTMF mode can be set via the menu. DTMF mode in accordance with ITU-T recommendation Q.23
Lightning / Transients	Protection meets ITU-T K.21 enhanced levels
Programming	It can be programmed remotely via DTMF tones or the keypad
Technical Specifications	
"M1 M2 M3" is used to set the speed dial key	
"📞" toggle audio hands-free mode	
"LR" button for last number redial	
"R" for flash recall	
"M" for muting	
"V±" for volume adjustment	
Compatible with all standard PABX systems	
Remote programming, allows you to manage your network from a central location	
Programmable auto hang-up timer	
Supports automatic dialing with delay after picking up the phone	
Supports scheduled dialing to the central control phone to detect whether the phone is working properly	
Supports the telephone line to power external light fixed on the top(no external power supply needed)	
Supports MIC mute function	
Supports call transfer	
Can be adapted according to the model of the Analog PABX to support the sequential calling function	
Phone line powered	
Wiring access, 2xM20 cable gland entry points	
Operating temperature -40°C to 65°C / Storage temperature -40°C to 75°C	
M.T.B.F. exceeds 50,000 hours under normal operating conditions	



TDM Middle East LLC
ADAFZ, Abu Dhabi, UAE

www.tdm-middle-east.com

info@tdm-middle-east.com

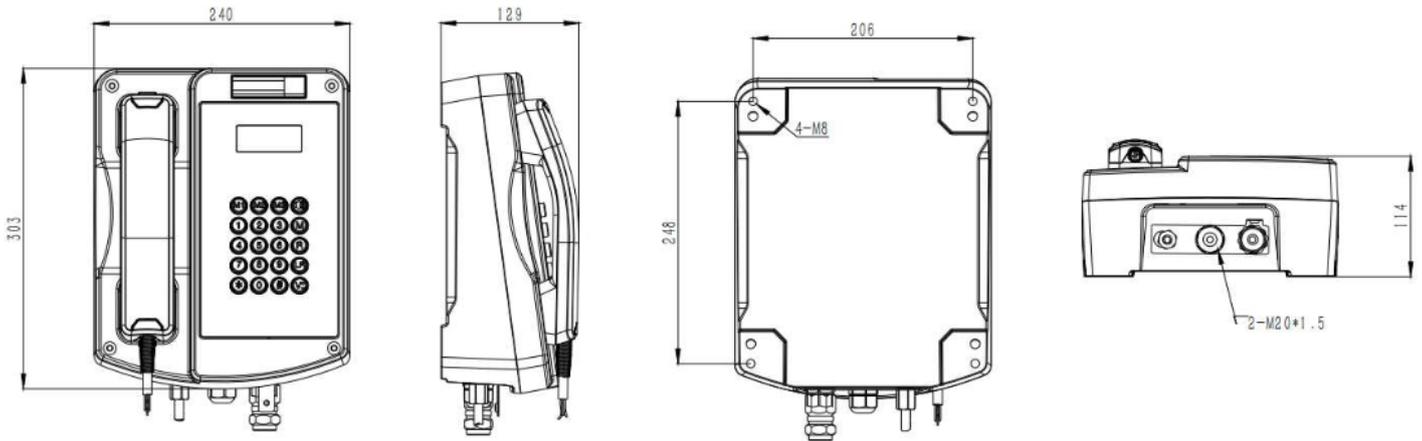

Package	
Unit size	303*240*129 (mm)
Shipping dimensions	405*280*170 (mm)
Packaging materials	Pearl cotton, carton
weight	Gross weight: 9 kg / Net weight: 8 kg

Accessories:



TDM Middle East LLC
ADAFZ, Abu Dhabi, UAE